

FXC9V-20 规格书

FXC9V-20 Relay Specification

1 订货标记 Ordering Information

FXC9 V - 20 / 450 - 12 - H T P 2 A (XXX)
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

① 产品型号 Type	FXC9
② 应用场合 Application	V: 新能源汽车领域 Vehicle
③ 负载电流 Lode Current	20: 20A
④ 负载电压 Lode Voltage	450: 450 Vd. c.
⑤ 线圈电压 Coil Voltage	12:12 Vd. c. 24:24 Vd. c.
⑥ 触点形式 Contact Type	H: 一组常开 1 Form A
⑦ 触点材料 Contact Termination	T: 银合金 Silver Alloy
⑧ 线圈引出形式 Coil Termination	Q: QC 引出端 QC Termination P: PCB 引出端 PCB Termination
⑨ 负载引出形式 Load Termination	2: QC 引出端 QC Termination 无 Nil: PCB 引出端 PCB Termination
⑩ 安装凸台 mounting boss	无 Nil: 无安装凸台 no mounting boss A: 带安装凸台 mounting boss
⑪ 特殊特性号 Special Code	客户需求 (当客户存在特殊需求时使用) customer demand(Only for special requirements)

2 线圈额定参数 Coil Rating

额定电压 Rated Voltage Vd.c.	动作电压 Operate Voltage Vd.c. (at -40 °C~85 °C)	释放电压 Release Voltage Vd.c. (at -40 °C~85 °C)	线圈电阻 Coil Resistance Ω (at 23 °C)	线圈功耗 Coil Power W (at -40 °C~ 85 °C)
12	≤9	≥1	48×(1±7%)	大约 Approx 3W
24	≤18	≥2	192×(1±7%)	大约 Approx 3W

3 触点参数 Contact Specification

- 3.1 触点形式 Contact Arrangement: 一组常开 H 1 Form A 。
- 3.2 触点材料 Contact Material: 银合金 Silver Alloy 。
- 3.3 接触电阻 Contact Resistance: ≤10 mΩ (at 1 A) 。
- 3.4 触点额定负载 Contact Rating: 20 A (≥4 mm² wire) 。
- 3.5 最大分断电流 Max. Breaking Current: 30A 450VDC (≥1 ops) 。
- 3.6 最大切换电压 Max. Switching Voltage: 750 Vd.c. 。
- 3.7 最小适用负载 Min. Applicable Load: 6 Vd.c. 1 A 。
- 3.8 电流耐受 Current Endurance

电流 Current	时间 Duration
20 A	持续/cont.
30 A	1 h
40 A	20 min
80 A	30 s
120 A	10 s
200 A	0.6 s

电流耐受条件 Condition for current endurance

- 1) 环境温度 Ambient temperature: 室温 Room temperature;
- 2) 线圈激励电压为线圈额定电压 Supply rated voltage to coil;
- 3) 使用 4 mm² 线径铜导线连接 The cross section area of wire is 4 mm²。

4 耐久性 Endurance

4.1 电耐久性 Electrical Endurance

产品型号 Product model	环境温度 Ambient Temperature	触点负载 Contact Rating	通断比 ON: OFF	电耐久性 Electrical Endurance
FXC9V-20	常温 Room Temperature	正向接通 Forward making: 稳态 Steady 20 A 触点电压 Contact Voltage 450 Vd. c.	0.3 s:5.7 s	7.5×10^4 次 (ops)
		正向接通 Forward making: 稳态 Steady 6 A 触点电压 Contact Voltage 750 Vd. c.	0.3 s:5.7 s	7.5×10^4 次 (ops)
		正向极限分断 Forward limit breaking (L/R \leq 1 ms): 稳态 Steady 30 A 触点电压 Contact Voltage 450 Vd. c	0.6 s on	1次 (ops)
		正向切换 Forward switching: 稳态 Steady 20 A 触点电压 Contact Voltage 450 Vd. c.	0.6 s:5.4 s	3×10^3 次 (ops)
		正向切换 Forward switching: 稳态 Steady 10 A 触点电压 Contact Voltage 450 Vd. c.	0.6 s:5.4 s	1×10^4 次 (ops)

4.2 机械耐久性 Mechanical Endurance

结构型式 Version	触点负载 Contact Rating	环境温度 Ambient Temperature	通断比 ON: OFF	机械耐久性 Mechanical Endurance
1组常开 1H	无负载 No load	常温 Room Temperature	0.25s:0.25 s	2×10^5 次 (ops)

5 绝缘电阻 Insulation Resistance

5.1 试验前 Before Test

断开触点电路的各引出端之间 Between open contacts: $1000 \text{ M}\Omega$ (500 Vd. c.)。

触点引出端与线圈引出端之间 Between contact and coil: $1000 \text{ M}\Omega$ (500 Vd. c.)。

5.2 试验后 After Test

断开触点电路的各引出端之间 Between open contacts: 50 M Ω (500 Vd. c.)。

触点引出端与线圈引出端之间 Between contact and coil: 50 M Ω (500 Vd. c.)。

6 介质耐压 Dielectric Strength (漏电流 Leak Current:1 mA)

6.1 试验前 Before Test

断开触点电路的各引出端之间 Between open contacts: 2500 Va. c. (50/60 Hz 1 min) 。

触点引出端与线圈引出端之间 Between contact and coil: 3000 Va. c. (50/60 Hz 1 min) 。

6.2 试验后 After Test

断开触点电路的各引出端之间 Between open contacts: 1875 Va. c. (50/60 Hz 1 min) 。

触点引出端与线圈引出端之间 Between contact and coil: 2250 Va. c. (50/60 Hz 1 min) 。

7 时间参数 Time(额定电压下 At Rated Voltage)

7.1 动作时间 Operate Time: ≤ 30 ms。

7.2 释放时间 Release Time: ≤ 10 ms。

7.3 回跳时间 Bounce Time: ≤ 5 ms。

8 振动 Vibration

正弦振动, 1.5 mm 双振幅, 10 Hz~500 Hz, 加速度 49 m/s², 三个相互垂直轴线的每一个方向 8 h (激励和非激励各 4 h), 共 24 h。继电器外观、结构和性能不应有异常。
Sinusoidal vibration, 1.5 mm double amplitude, 10 Hz to 500 Hz, acceleration 49 m/s², 8 hours each for every axis, 4 hours each for the energized and non-energized status, total 24 hours. There shall not be any abnormalities on relay appearance, construction and performance.

9 冲击 Shock

9.1 稳定性 Functional

线圈激励, 196 m/s²(脉冲持续时间 11 ms), 线圈非激励, 196 m/s²(脉冲持续时间 11 ms), 3000 次(三个相互垂直轴线的每一个方向 500 次, 激励和非激励各 250 次), 闭合回路的断开或开路回路的闭合时间应不超过 10 μ s。
energized status 196 m/s², duration 11 ms, non-energized status 196 m/s², duration 11 ms, 500 ops for each direction of three mutually perpendicular axes, 250 ops each for the energized and non-energized status, total 3000 shocks. The opening time for close contacts or the closing time for open contacts should not exceed 10 μ s.

9.2 强度 Destructive

490 m/s² (脉冲持续时间 6 ms) , 300 次(三个相互垂直轴线的每一个方向 50 次) 继电器外观、结构和性能不应有异常。490 m/s², duration 6 ms, 50 shocks for each directions of three mutually perpendicular axes, total 300 shocks . There shall not be any abnormalities on relay appearance, construction and performance.

10 标准测试条件 Standards Test Condition

10.1 温度 Temperature: 23 °C ± 5 °C。

10.2 湿度 Humidity: 25 % ~ 75% RH。

10.3 方向 Direction of Measurement: 任意 Free 。

11 使用条件 Operating Condition

11.1 温度 Temperature: -40 °C ~ 85 °C 。

11.2 湿度 Humidity: 5 % ~ 85 % RH 。

11.3 安装方向 Mounting Direction: 任意 Free 。

注：使用环境条件不能导致继电器内部产生结露、结冰，否则会导致继电器失效。

Note: The ambient environment of application shall not cause any dewing or icing inside the relay. Otherwise, the relay may fail to work consequently.

12 贮存条件 Storage Condition


12.1 温度 Temperature: -40°C ~ 85°C 。

12.2 湿度 Humidity: 5% ~ 85% RH 。





13 产品结构 Configuration

13.1 外形图 Outline Dimensions:




型号: FXC9V-20/450-XX-HTP

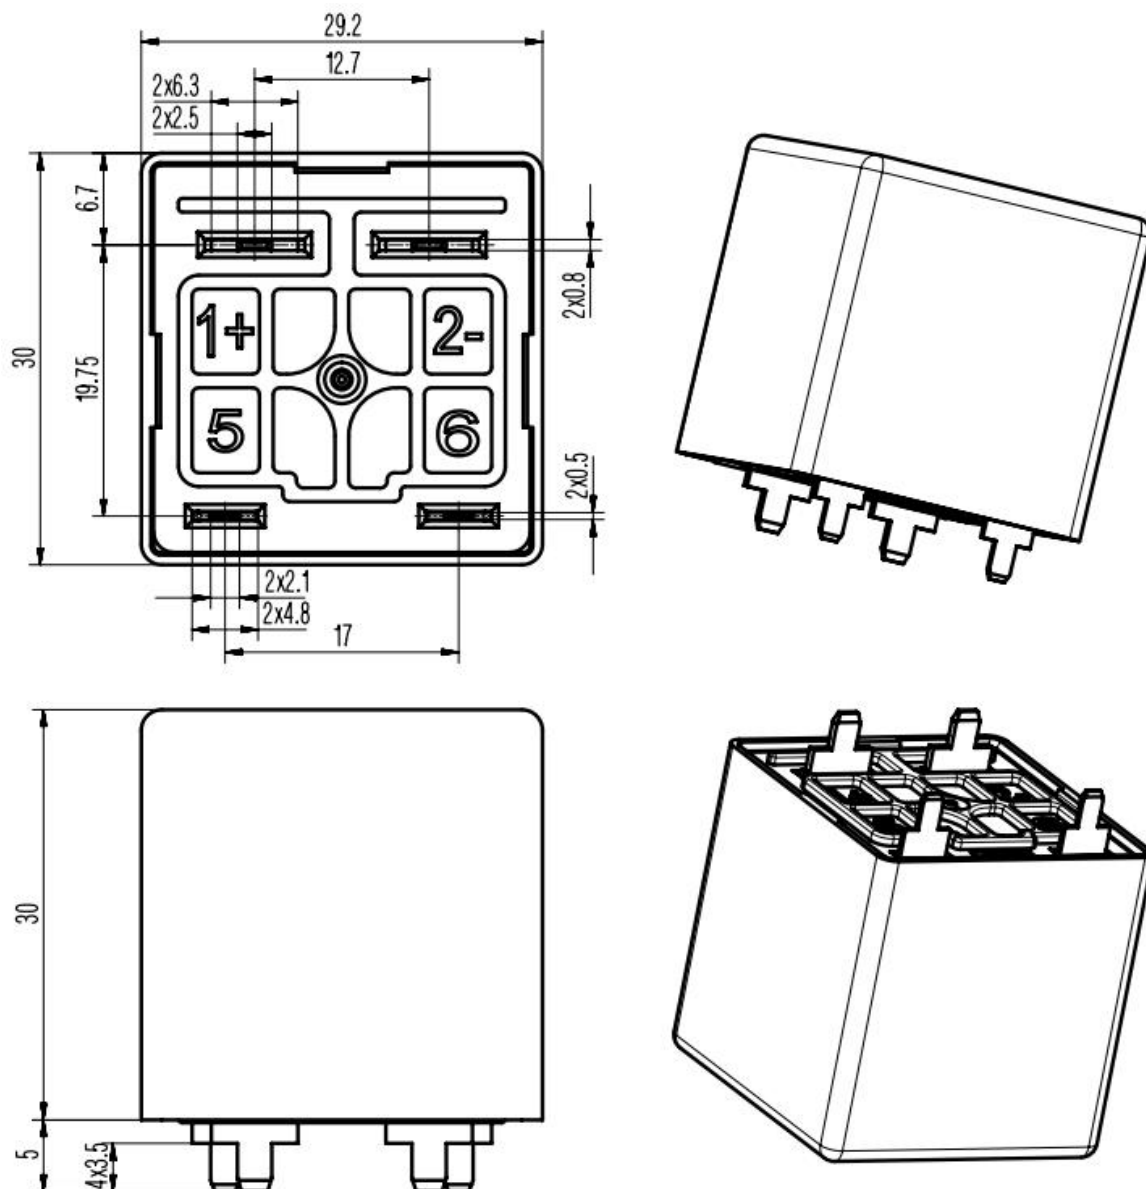

型号: FXC9V-20/450-XX-HTQ2

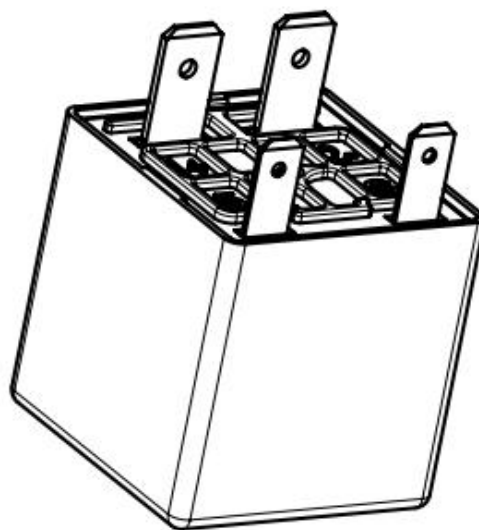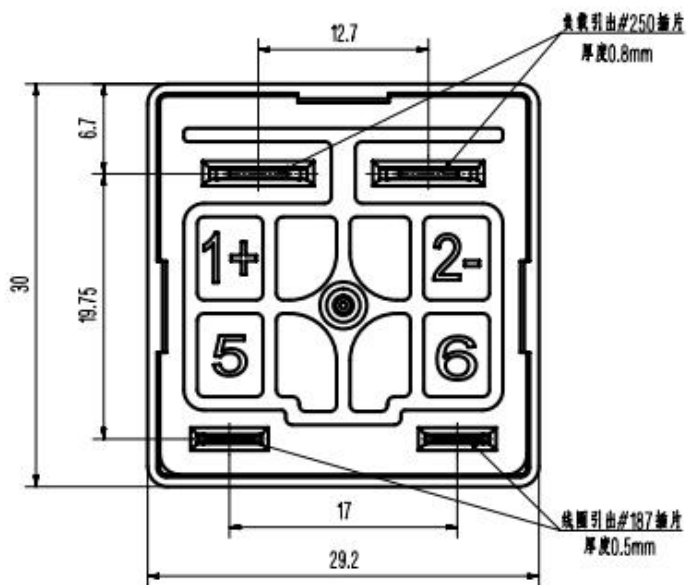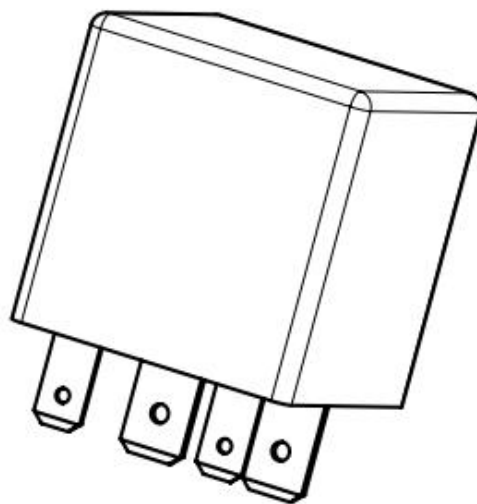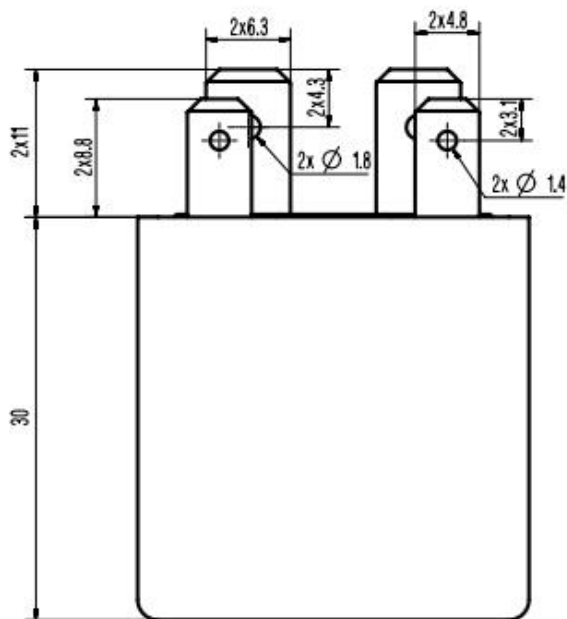

型号: FXC9V-20/450-XX-HTQ2A

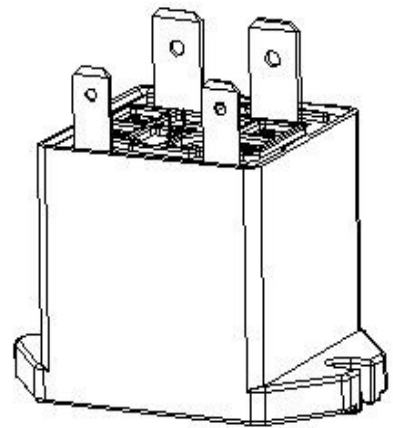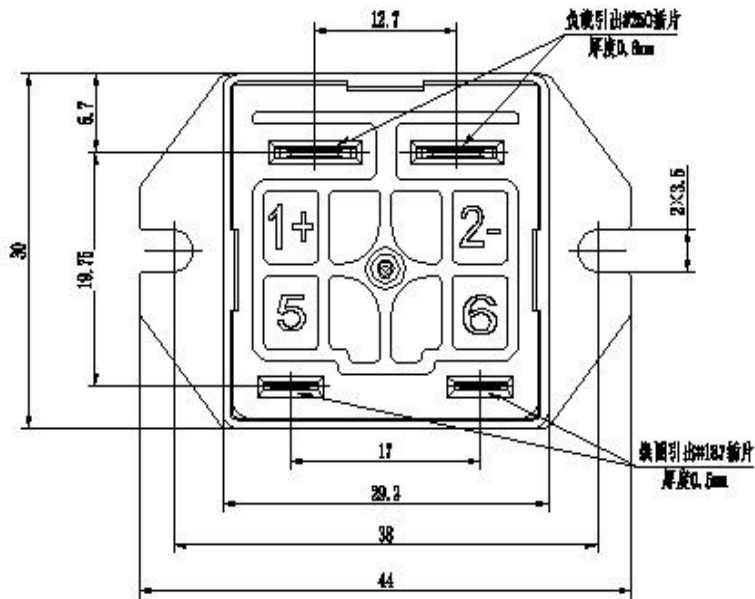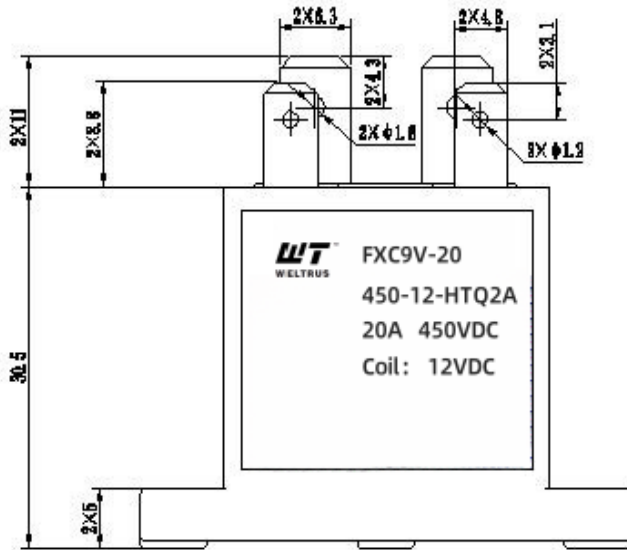


产品型号 Product model	重量 Unit Weight
FXC9V-20/450-XX-HTXXX	约 50g

注 1: 产品外形尺寸未注尺寸公差按下表执行。

Note 1: All unspecified tolerance according to following table.

产品外形尺寸未注尺寸公差 Outline dimensions hadn't specified tolerance	
外形尺寸 Outline Dimensions	公差 Tolerance
≤ 10	± 0.3
$> 10 \sim 50$	± 0.5
> 50	± 0.8

13.2 接线图 Wiring Diagram

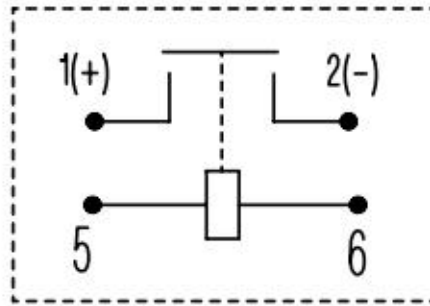

注1: 负载有极性、线圈无极性。

Note 1: Polarity option on the load; no polarity on coil.

14 其他说明 Others

14.1 供应商 Supplier

14.2 规格书内的各项性能参数是基于标准测试条件下测得的初始值。All the performance data listed in the datasheet are the initial values tested under standard testing condition.

14.3 注意事项 Notes

14.3.1 对Weltrus而言, 不可能评定继电器在每个具体应用领域的所有性能参数要求, 因而客户应根据具体的使用条件选择与之相匹配的产品, 若有疑问, 请与Weltrus联系, 以便获取更多的技术支持; 但产品选型责任仅由客户负责。Weltrus could not evaluate all the performance and all the parameters for every potential application. The customer can choose the right product according to the specific usage conditions and requirements. If there is any queries, please contact Weltrus for the technical

service. However, customer will responsible for what they choose and it is the user's responsibility to determine which product should be used.

14.3.2 我司承诺的负载, 在没有特别说明时, 均指额定负载, 产品使用于我们承诺的负载条件之外时, 我公司不承担因此造成的失效责任。Without special note, the load we commit to the load is the rating load. Weltrus doesn't response for any usage beyond our guarantee.

14.3.3 触点额定值均为阻性负载时的数值, 使用 $L/R \geq 1\text{ms}$ 的感性负载 (L 负载) 的情况下, 请与感性负载并行采取浪涌吸收措施。未采取措施的情况下, 可能会造成电气寿命下降、发生切断不良。The rating load of contact is resistive load. Please assure a surge absorption device together with inductive load when using the $L/R \geq 1\text{ms}$ inductive load (L Load), otherwise it may lead to the decrease of electrical endurance and defective switch.

14.3.4 为抑制继电器线圈的反向电动势, 建议加装非线性电阻 (推荐使用可变电阻, 最大能量耐量: 1J 以上; 电压: 额定电压的 1.5~2 倍)。若使用二极管, 会使继电器释放时间大大加长, 肯定会导致切断性能下降, 敬请注意。In order to curb the reverse electromotive force of coil, a nonlinear resistor is recommended to use (ZNR is recommended, the max energy tolerance: $\geq 1\text{J}$; Voltage: 1.5~2 times the rated voltage). Please be noted that a diode will make the release time of relay increase, which should lead to the degradation of cutting-off capability.

14.3.5 请避免在强磁界 (变压器、磁铁的周围) 和发热物体的附近安装。Please avoid installation in strong magnetic field (around the transformers & the magnet) and the heating objects nearby.

14.3.6 为防止出现松动, 继电器安装时请使用垫圈。继电器安装处 HTQ2A 型脚位请使用 M3 螺钉, 螺钉锁紧扭矩请控制在 $1.4\text{N}\cdot\text{m} \sim 2.2\text{N}\cdot\text{m}$; 继电器引出脚允许的插拔力为: (1) 负载引出端 49N, (2) 线圈引出端 49N。在超过范围的情况下, 可能会造成破损。In order to prevent loosening, please use the washer when installing the relay. Please use the M3 screws to install relay with HTQ2A type terminals, screw locking torque within $1.4\text{N}\cdot\text{m} \sim 2.2\text{N}\cdot\text{m}$; Allowable pulling or pushing force for the terminal: (1) load terminal 49N; (2) coil terminal 49N. Damage may occur when it is beyond the range.

14.3.7 PCB 板焊接参数为: 手工焊 (380 ± 20) °C, 时间 (3~5) s; 波峰焊 (260 ± 5) °C, 时间 (3~5) s。PCB welding parameters: manual welding (380 ± 20) °C, time (3~5) s; wave soldering (260 ± 5) °C, time (3~5) s.

14.3.8 请避免在引出片上粘附油脂等异物, 请使用 4mm^2 以上规格的连接导线, 否则有可能会造成引出端部分的异常发热。Please avoid grease and other foreign matter

in the terminal, please use the connecting wire with a cross section area ≥ 4 mm², or they may cause overheating to the terminal part.

14.3.9 在继电器坠落的情况下，原则上请不要再使用。In principle, please do not use it when the relay has fallen down.

14.3.10 环保措施 Environmental Protection

Weltrus产品均符合 RoHS 要求。Weltrus products are all RoHS compliant.

14.3.11 Weltrus保留对产品更改的权利，客户在首次下单之前应确认此规格书内容，必要时可要求我司提供新的规格书。Weltrus reserves the right to make changes. Customers should reconfirm the contents of the specification before first orders and ask for us to supply a new specification if necessary.